


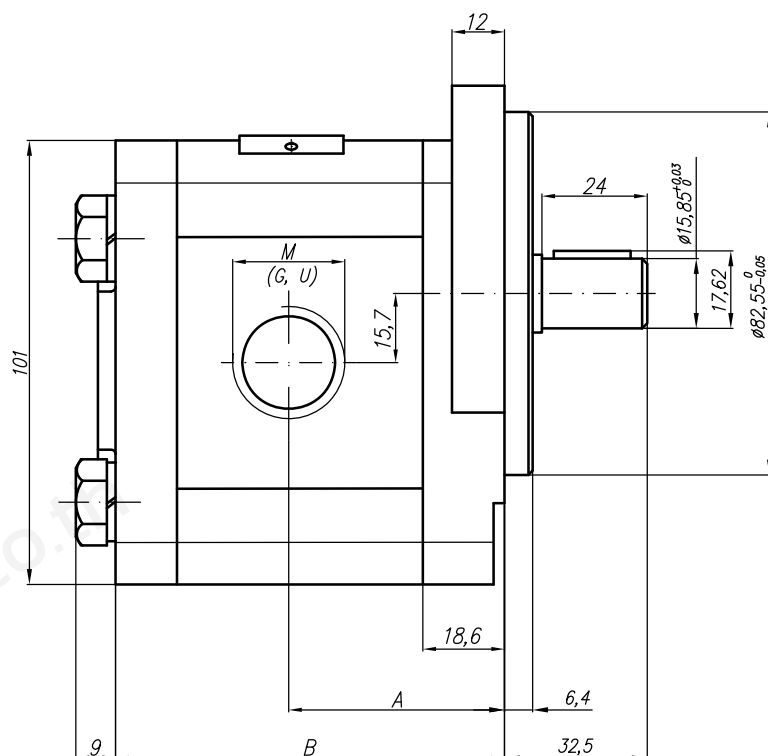

Type	Displacement	Flow		Pressure P _{nom}	max Speed n	Dimension							
		at 1500 rpm	at max rpm			A	B	Inlet			Outlet		
	cm ³ /rev	l/min	l/min	bar	rpm	mm	mm	M	G	U	M	G	U
20A(C)4,5X030...	4,5	6,14	14,33	250	3500	41,4	79,6	M20x1,5	G1/2	1 1/16"-12UNF	M16x1,5	G1/2	7/8"-14UNF
20A(C)6,3X030...	6,3	8,69	20,29	250	3500	42,6	82,6						
20A(C)8,2X030...	8,2	11,32	26,40	250	3500	44,7	85,5		G3/4				
20A(C)10X030...	10	13,95	32,55	250	3500	49,1	88,6						
20A(C)11X030...	11,3	15,76	36,78	250	3500	49,1	90,7						
20A(C)12X030...	12	16,92	39,48	250	3500	49,1	91,9						
20A(C)14X030...	14	19,95	46,55	250	3500	49,1	95						
20A(C)15X030...	15	21,60	36,00	250	2500	49,1	96,5						
20A(C)16X030...	16	23,04	38,40	250	2500	49,1	98,2						
20A(C)19X030...	19	27,36	45,60	200	2500	49,1	103,1						
20A(C)22X030...	22	31,68	42,24	180	2000	56,6	108,1						
20A(C)25X030...	25	36,00	48,00	160	2000	58,8	113						
20A(C)14X030H...	14	20,16	47,04	250	3500	55,3	105,7	M20x1,5	G3/4	1 1/16"-12UNF	M16x1,5	G1/2	7/8"-14UNF
20A(C)15X030H...	15	21,60	43,20	250	3000	55,6	106,8						
20A(C)16X030H...	16	23,04	46,08	250	3000	56,5	108,4						
20A(C)17,3X030H...	17,3	24,91	49,82	230	3000	57,6	110,5						
20A(C)18,2X030H...	18,2	26,21	52,42	210	3000	58,4	112,1						
20A(C)19X030H...	19	27,36	54,72	200	3000	59	113,4						
20A(C)22X030H...	22	31,68	52,80	180	2500	61,5	118,4						
20A(C)25X030H...	25	36,00	60,00	160	2500	63,9	123,3						
20A(C)28X030H...	28	40,32	67,20	130	2500	66,4	128,1	M27x2	G1	1 5/16"-12UNF	M20x1,5	G3/4	1 1/16"-12UNF
20A(C)32X030H...	32	46,08	61,44	120	2000	69,6	134,4						
20A(C)36X030H...	36	51,84	69,12	100	2000	72,8	141						