



CARTRIDGE VALVES

DIMENSIONS

MILLIMETERS(INCHES)

NEEDLE CHECK VALVES

(Screw - in Cartridge Valves)

Ordering Code

CCN - 122 - L - 0.2 N

Seals: N-Buna N
V-Viton

Cracking Pressure
0.2 - 0.2 bar
2.0 - 1.8 bar
4.0 - 3.5 bar

Controls:
L - Leakproof

Cavity Size




Needle Check Valves

Cartridge Valve Specifications

Flow rating	80 lpm (21 gpm)
Max. Pressure	250 bar (3500 psi)
Weight of Cartridge	0.23 kg
Cavity No.	C - 122 (See Cavity Details section)
Cavity Tools	CT22-D, CT22-R
Mounting	No Restrictions
Description	Poppet, Direct Acting



Flow-Pres. Drop Curve

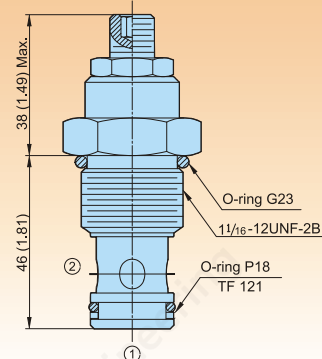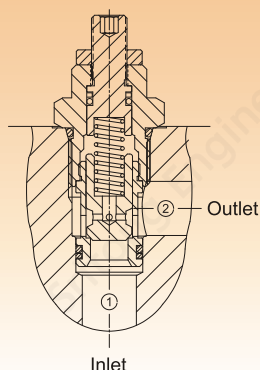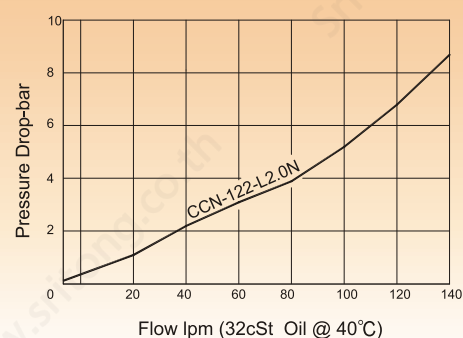

CCV SERIES CHECK VALVES

(Screw - in Cartridge Valves)

Ordering Code

CCV - 062 - X - 0.2 N

Seals: N-Buna N
V-Viton

Cracking Pressure
0.2 - 0.2 bar
2.0 - 1.8 bar
4.0 - 3.5 bar
7.0 - 7.0 bar

Controls:
X - Non - Adjustable

Cavity Size

Series No. Check Valves

Cartridge Valve Specifications

Flow rating	40 lpm (10 gpm)
Max. Pressure	315 bar (4500 psi)
Weight of Cartridge	0.06 kg
Cavity No.	C - 062 (See Cavity Details section)
Cavity Tools	CTS6-D, CTS6-R
Mounting	No Restrictions
Description	Poppet Type



Flow-Pres. Drop Curve

