




## FLOW CONTROL VALVES

### DIMENSIONS

### MILLIMETERS(INCHES)

#### CLT-03-06

#### Deceleration with Check Valves(Threaded Type)


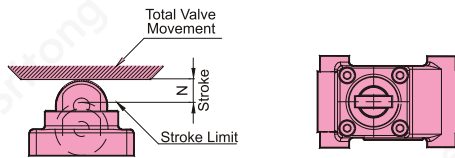


##### Valve Specifications & Attachment

| Model           | CLT-03             | CLT-06             |
|-----------------|--------------------|--------------------|
| Flow Rating     | 30 lpm (7.92 gpm)  | 85 lpm (22.4 gpm)  |
| Max. Pressure   | 140 bar (2000 psi) | 140 bar (2000 psi) |
| Weight kg(lbs.) | 5 (11.0)           | 5 (11.0)           |
| CODE:20         | 3/8" PT            | 3/4" PT            |
| CODE:2090       | 3/8" NPT           | 3/4" NPT           |




SYMBOL

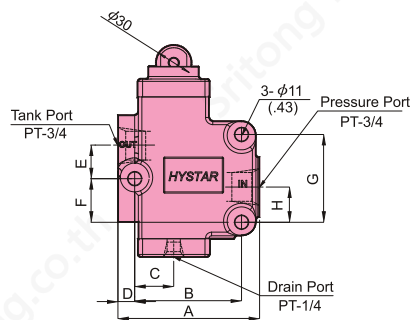

| Model  | A         | B        | C        | D         | E        | F        | G        | H        | I           | J           | K        | L        | M        | N        | O       |
|--------|-----------|----------|----------|-----------|----------|----------|----------|----------|-------------|-------------|----------|----------|----------|----------|---------|
| CLT-03 | 116(4.56) | 84(3.30) | 31(1.22) | 16(.62)   | 34(1.33) | 16(.62)  | 68(2.67) | 26(1.02) | 161(6.33)   | 144.5(5.68) | 68(2.67) | 34(1.33) | 8(.31)   | 27(1.06) | 12(.47) |
| CLT-06 | 118(4.64) | 90(3.54) | 33(1.29) | 13.5(.53) | 28(1.10) | 35(1.37) | 73(2.87) | 29(1.14) | 176.5(6.94) | 158.5(6.24) | 76(2.99) | 38(1.49) | 9.5(.37) | 30(1.18) | 12(.47) |

#### CLG-06

#### Deceleration with Check Valves(Sub-Plate Type)



##### Valve Specifications & Attachment

| Model           | CLG-06             |
|-----------------|--------------------|
| Flow Rating     | 85 lpm (22.4 gpm)  |
| Max. Pressure   | 250 bar (3600 psi) |
| Weight kg(lbs.) | 9 (19.8)           |
| CODE:20         | M10X100LgX4pcs     |
| CODE:2090       | 3/8-16UNCX4LgX4pcs |
| Surface O-Ring  | P28X2pc            |



SYMBOL

