

DIMENSIONS

MILLIMETERS(INCHES)

CNB SERIES NEEDLE VALVES

(Screw - in Cartridge Valves)

Ordering Code

CNB - 082 - L - 20 N

Seals: N-Buna N
V-Viton

Flow Ranges
20 - 0 to 20 lpm

Controls:
KS - Handknob
L - Leakproof

Cavity Size

Series No. Needle Valves





Cartridge Valve Specifications

Flow rating	20 lpm (5 gpm)
Max. Pressure	250 bar (3500 psi)
Weight of Cartridge	KS: 0.15kg (L: 0.09kg)
Cavity No.	C - 082 (See Cavity Details section)
Cavity Tools	CT28-D, CT28-R
Mounting	No Restrictions
Description	Fine Adjustment, Positive Shut off

Control "KS"



SYMBOL

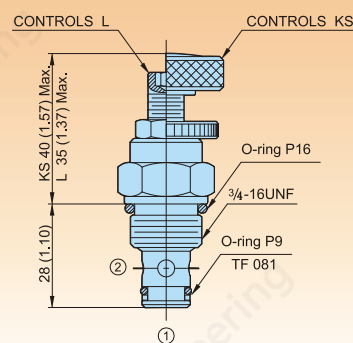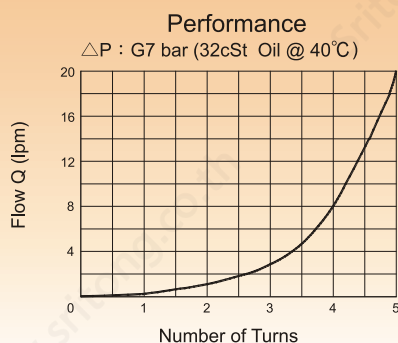

CNV SERIES NEEDLE VALVES

(Screw - in Cartridge Valves)

Ordering Code

CNV - 082 - L - 30 N

Seals: N-Buna N
V-Viton

Flow Ranges
30 - 0 to 30 lpm

Controls:
KS - Handknob
L - Leakproof

Cavity Size

Series No. Needle Valves

Cartridge Valve Specifications

Flow rating	30 lpm (8 gpm)
Max. Pressure	250 bar (3500 psi)
Weight of Cartridge	KS: 0.15kg (L: 0.09kg)
Cavity No.	C - 082 (See Cavity Details section)
Cavity Tools	CT28-D, CT28-R
Mounting	No Restrictions
Description	Direct Acting, Positive Shut off

Control "KS"



SYMBOL

