



CARTRIDGE VALVES

DIMENSIONS

MILLIMETERS(INCHES)

CVR SERIES RELIEF VALVES - VENTED (Screw - in Cartridge Valves)

Ordering Code

CVR - 063 - K - 10 N



Seals: N-Buna N
V-Viton

Adjustment Ranges
10 - 5 to 100bar
20 - 7 to 210bar
30 - 10 to 315bar
1S - 3.5 to 100bar (option)
2S - 5 to 210bar (option)

Controls: K-Handknob
L-Leakproof



Cavity Size

Series No. Ventable Relief Valves

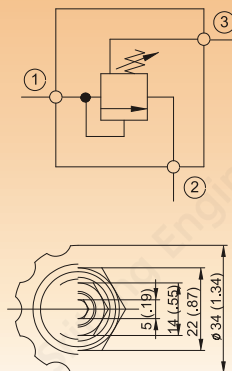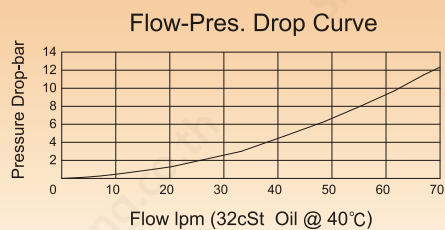

Cartridge Valve Specifications

Flow rating	50 lpm (13 gpm)
Max. Pressure	315 bar (4500 psi)
Weight of Cartridge	K: 0.17 kg (L: 0.14 kg)
Cavity No.	C - 063 (See Cavity Details section)
Cavity Tools	CT36-D, CT36-R
Mounting	No Restrictions
Description	Vented Spool, Pilot Operated

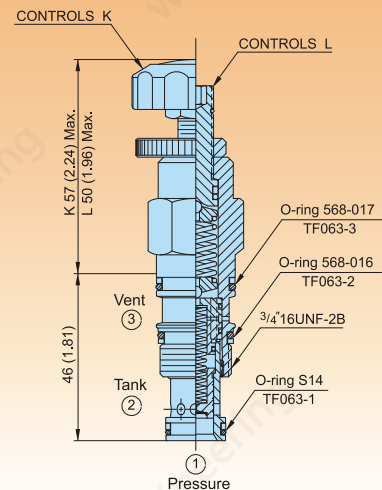

CSV SERIES-SEQUENCE VALVES (Screw - in Cartridge Valves)

Ordering Code

CSV - 063 - K - 20 N



Seals: N-Buna N
V-Viton

Adjustment Ranges
10 - 5 to 100bar
20 - 7 to 210bar

Controls: K-Handknob
L-Leakproof

Cavity Size

Series No. Sequence Valves

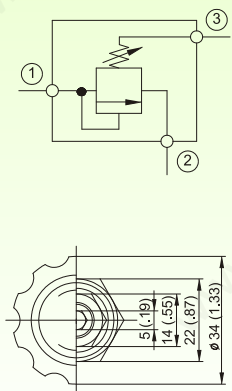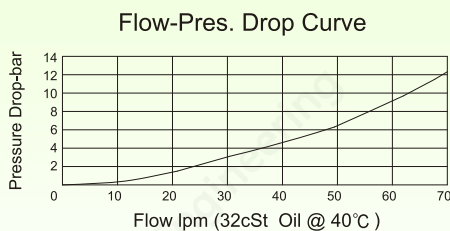

Cartridge Valve Specifications

Flow rating	60 lpm (16 gpm)
Max. Pressure	315 bar (4500 psi)
Weight of Cartridge	K: 0.17 kg (L: 0.14 kg)
Cavity No.	C - 063 (See Cavity Details section)
Cavity Tools	CT36-D, CT36-R
Mounting	No Restrictions
Description	Pilot Operated, Blanced Spool

