

手動式注油器

Specifications :

For which the oil pump is set in an oil tank with a loading capacity of 600cc, to operate the oil pump just pull away the handle manually, whereupon the plug will feed out the oil by the compression of the spring, the oil being fed out depending upon the viscosity of the oil in use, the oil pump fitted with with a check valve to prevent return of the oil being fed out, the oil tank made of

high grade aluminum alloy molded through extrusion skill and gone through painting finishing, looks great in appearance, the paint will never strip off, Model WEA-8 comprising both sides, right and left, in execution, please purchase according to your specific requirements, compact in size, easy for installation, best suitable for oil feeding holes up to 10 sites.

型 式 TYPE	吐 出 量 Output	吐出壓力 Discharge Pressure	容 量 Tank Vol.	有效容量 Effective Vol.	吐出口徑 Outlet Dia.	吐出口數 Outlet Points	使用油 Oil	固定孔 Fix Hole	重 量 w.t / kg
WEA-8	8cc/strok	3.5kg/cm ²	600cc	500cc	4 ø or 6 ø	1P	machine oil	R.&L./ 左,右	0.93

11


手壓式給油裝置

One Shot Lubricating Pump (R.L.)

TYPE:KCL 8

規格說明

1. 注入清潔潤滑油進入油桶內。
2. 使用時，手壓把手，則潤滑油即由出口射出。
3. 本型係4m/m或6m/m之單一配管，能簡單地僅以手按即可提供數十處以上之供油能力，通常使用於一日供2次到1星期數次之程度。
4. 本型幫浦，使用於各種工作母機、壓床、沖床、銑床、磨床、複合機專用機及特殊機械等。
5. 過濾網請每年更換一次或多次。

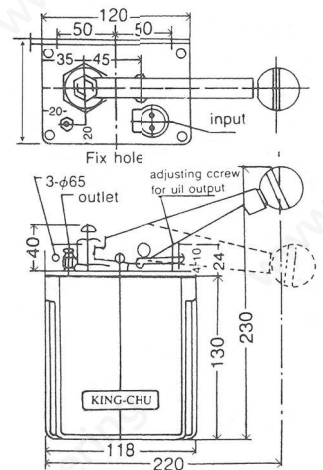

Specifications :

1. Fill the clean oil into the oil tank up to the top level.
2. Push the handle and the oil output from the outlet immediately.
3. This model is fitted with a ø4m/m or ø6m/m single pipe, able to feed oil for tens places or more simply by one press with a hand, usually used for feeding oil a few times per day to the extent of several times per week.
4. It is used for each kind of machine tools, such as lathe, press, milling machine, grind machine, PVC injection machine and all of special machines.
5. Please replace the filter once per year or more.



型 式 TYPE	吐 出 量 Output	吐出壓力 Discharge Pressure	吐出口徑 Outlet Dia.	給油能力 Points	油桶容量 Cap	油桶材質 Material	重 量 w.t / kg
KCL-8	2-7 cc	5 kg/cm ²	4 ø or 6 ø	20-40P	0.8 L	Resine	1.3

12

手搖式黃油泵浦

Manual Grease Pump

TYPE:WLG-D5, D5-2

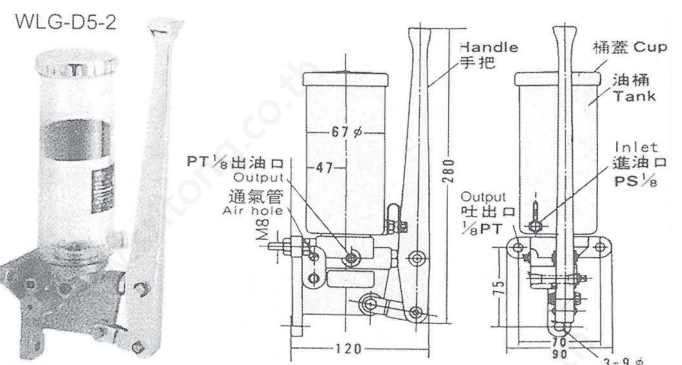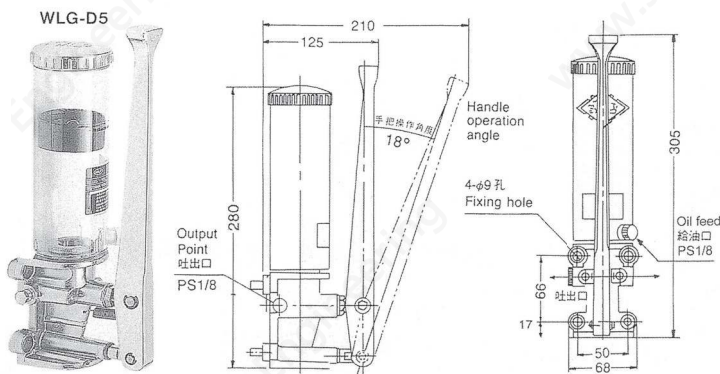

規格說明

手動式黃油泵浦因採用單管方式，故不需要回管，能以簡潔的配管獲得優越的效果。

Specifications :

Employing single pipe in execution, unnecessary the provision of return pipes, will achieve excellent results with simple provided piping networks.