
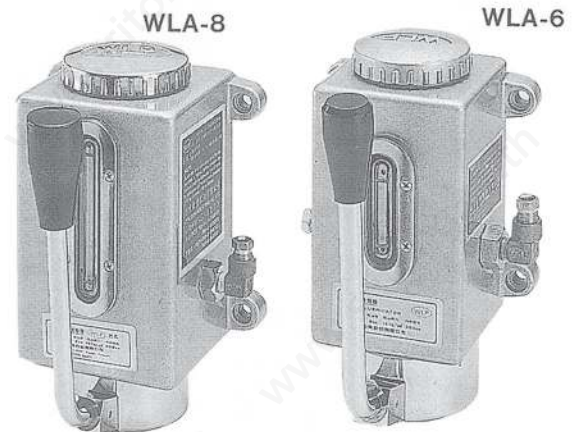


9

手搖式注油器

Lever Lubricator

TYPE:WLA-8, WLA-6

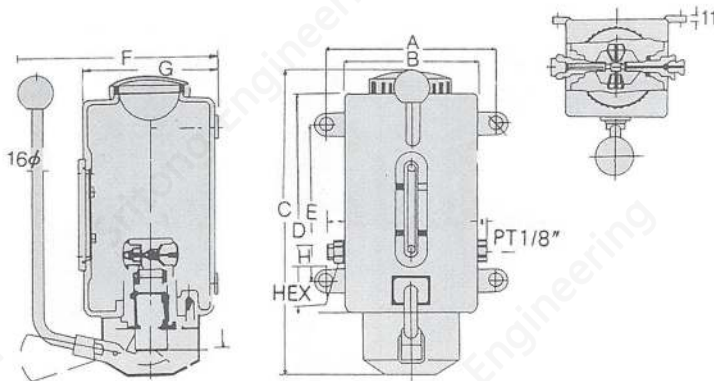

規格說明

本油泵係利用手搖把手操作之注油器，油泵裝設在一能容納600或350cc之油箱內。操作時將油泵把手，前後反覆動作，活塞靠彈簧之壓縮將油輸送出，油量與壓力，依油之黏度而定，油泵本體裝設有止逆閥，防止機油之迴流，油箱本體採用特殊鋁合金，由模具壓製成型，加以精密加工和高級烤漆而製成，品質精良外型美觀，本注油器設有二個出油孔，配裝4mm或6mm之油管(尼龍管或鋁管)來使用。

Specifications :

This oil pump utilize an oil feeder operable with a lever, the pump installed in an oil tank with a capacity of 600cc or 350cc to operate the oil pump handle has to be moved about to and for in repetition,

the piston feeding out the oil by the compression of a spring, oil amount and pressure depending on the viscosity of the oil, the oil pump fitted with a check valve to prevent return of oil, the oil pump made of special aluminum alloy and taking form through molding skill, through precision processing and high grade painting, outstanding in performance and beautiful in appearance, oil feeder furnished with two oil outlets, can be assembled with oil pipes which can be nylon or aluminum pipes of 4mmø or 6mmø for use.

The model WLA-8 having a resistance against pressure in excess of 15kg/cm², can be used with larger machines having less than 40 oil feeding sites, such as machines of industries including punch, shearing bed, milling machine, grinding machine, planer composite machines, cutting and shearing machines, weaving machines, knitting.

型 式 TYPE	吐 出 量 Output	吐出壓力 Discharge Pressure	油桶容量 Tank Vol.	有效容量 Effective Vol.	重 量 w.t / kg
WLA-8	8 c.c./1 stroke	15kg/cm ²	600c.c.	400cc	1.4
WLA-6	6 c.c./1 stroke	15kg/cm ²	350c.c.	250cc	1.2


型 式 TYPE	A	B	C	D	E	F	G	H	I
WLA-6	85	70	165	118	85	125	70	12	
WLA-8	100	85	185	139	110	140	184	12	12

10

手拉式注油器

Manual Lubricator

TYPE:WEA-8 (R.L.)

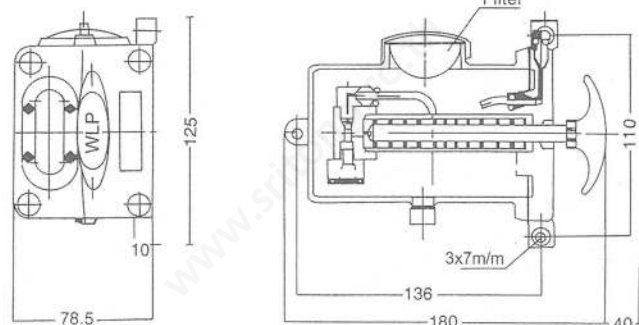

規格說明

此種利用手拉操作之注油器，是一種把油泵裝在一個能容納600cc之油箱內，本油泵的動作是用手將把柄拉開，此時活塞靠彈簧之壓縮將油送出，壓出油量依所使用油之黏度而定，油泵本體設

有止逆閥，以防止所輸出之油之迴流。油箱是採用高級鋁合金，經由模具壓鑄成型後，再由高級漆料烤製而成，外觀美麗、絕不脫漆。WEA-8型分左右邊，可依您的需要選購。本油泵體積精巧、安裝容易，最適合於10點以內加油孔使用。