



MECHANICAL VALVES

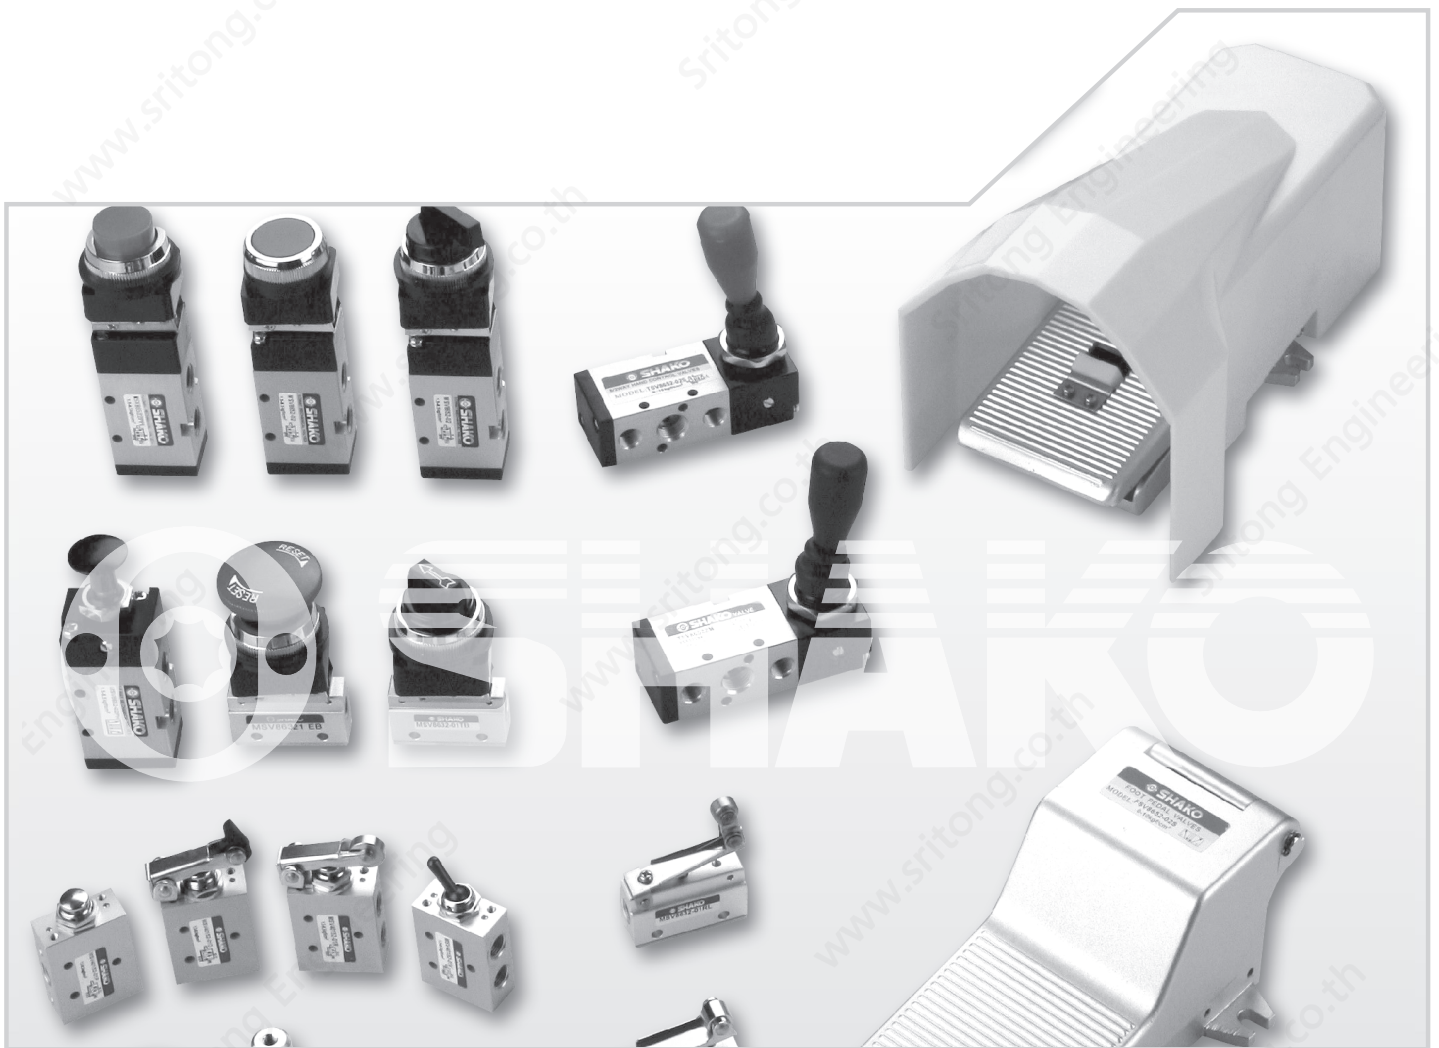

Features

- * To be installed in moving devices like air cylinder, slide...etc.
- * Various operating styles.
- * Panel bore size $\phi 30$ (Option $\phi 25$).

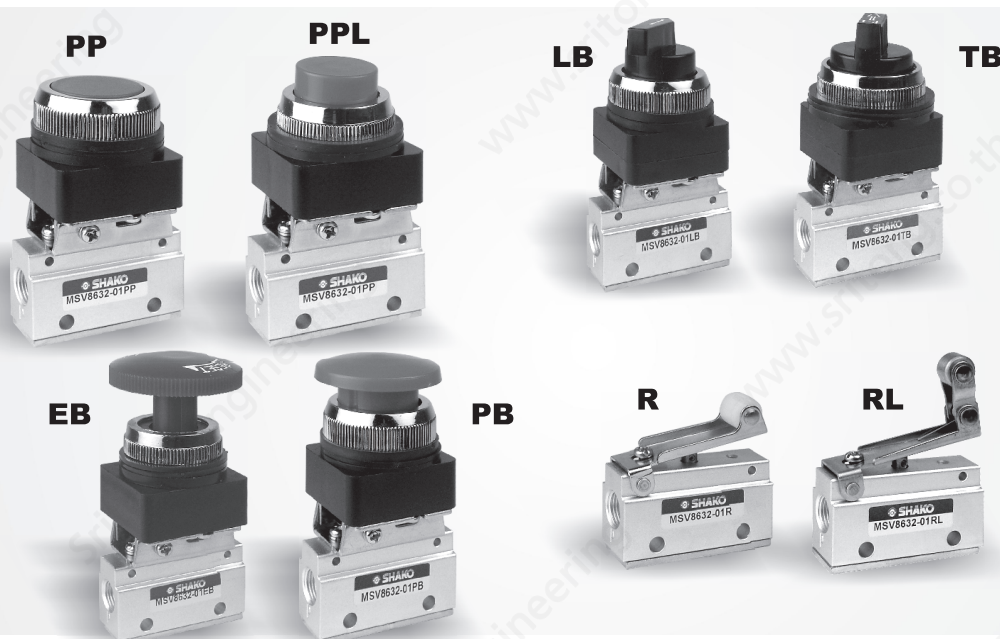

How to order

MSV8632

01

N

R

G

Mechanical valves		Port size		Thread		Operator				Operator color	
MSV8622	Single	01	1/8"	Blank	PS	R	Roller	PB	Palm button (Mushroom)	Blank	Standard color
MSV8642	Stack			N	NPT	RL	One way roller	PP	Palm button (Flush)	G	Green
MSV8632	Single (with exhaust port)			* MSV8642 & MSV8662 for TB operator only	TB	Twist selector	PPL	Palm button (Extended)	B	Black	
MSV8662	Stack (with exhaust port)				LB	Long twist selector	EB	Stop cock button	Y	Yellow	


* MSV8642 & MSV8662 for TB operator only.

Specifications


Model	MSV8632-01	MSV8642-01TB
Port size	1/8"	
Body material	Aluminum alloy	
Panel dimension	30mm (Option:25mm)	
Fluid	Compressed air	
Sectional area	1.8mm ²	
Operating pressure range	0 ~ 9 kgf/cm ²	
Max. operating pressure	10 kgf/cm ²	
Ambient temperature	-10°C ~ 60°C	
Standard operator color	Black: TB, LB; Red: PB, PP, PPL, EB	

Dimensions

MSV8622-01

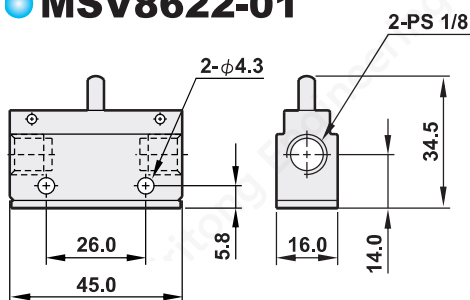


MSV8632-01




MSV8642-01TB

MSV8662-01TB

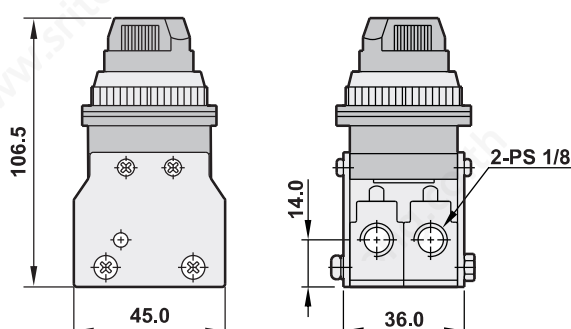


Dimensions


PP

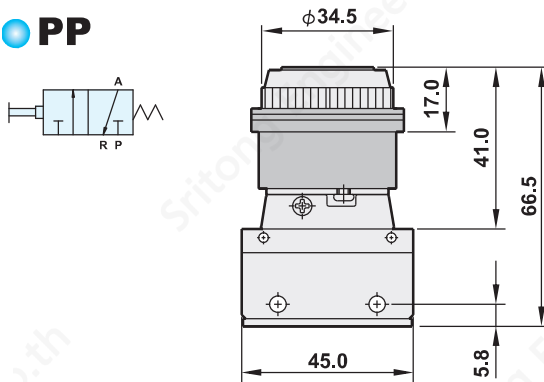


PPL

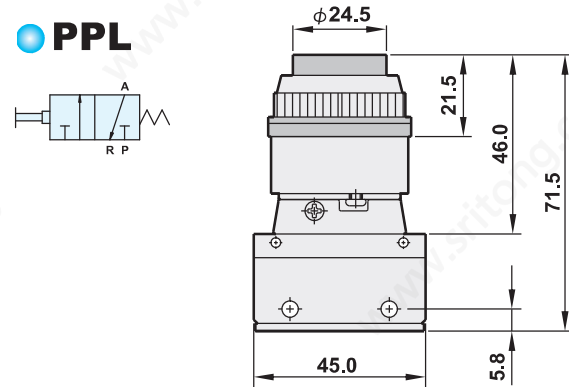


LB

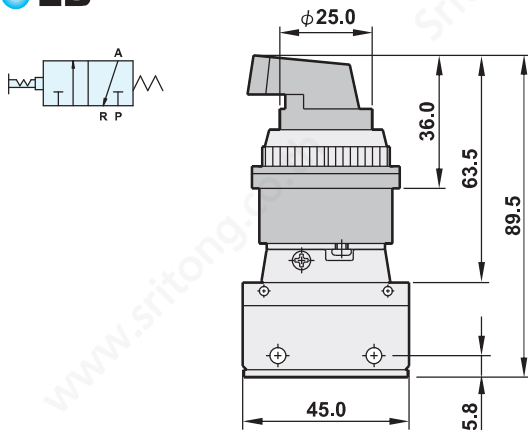


TB

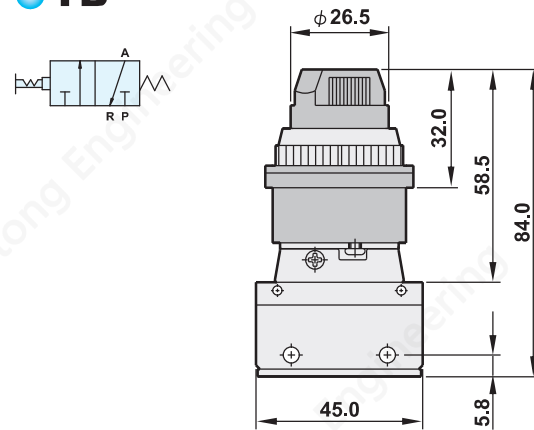


EB

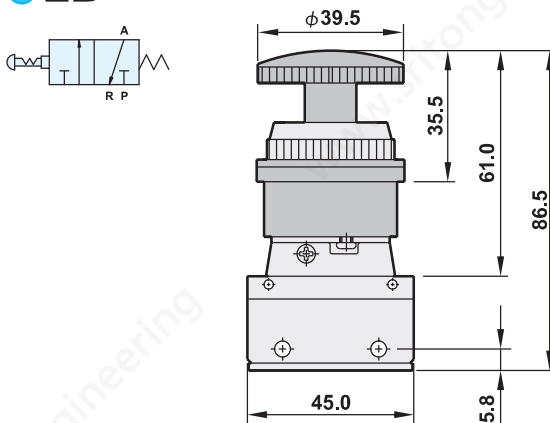

PB

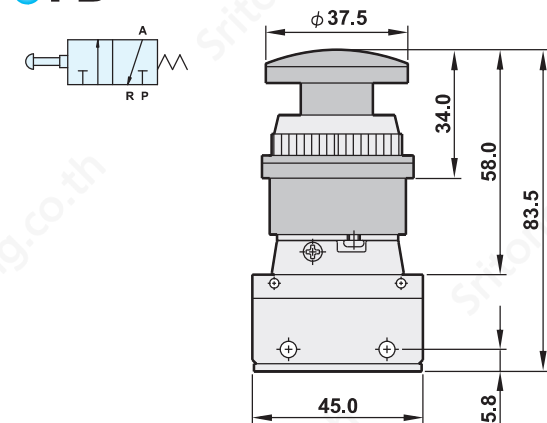

R

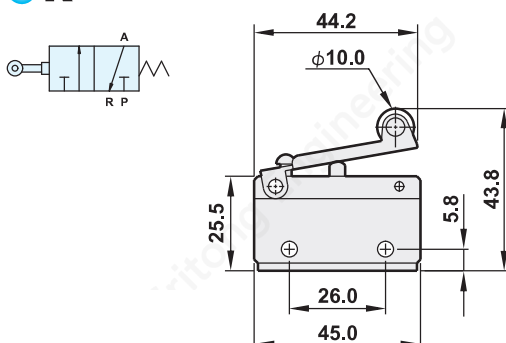

RL

