


MECHANICAL VALVES


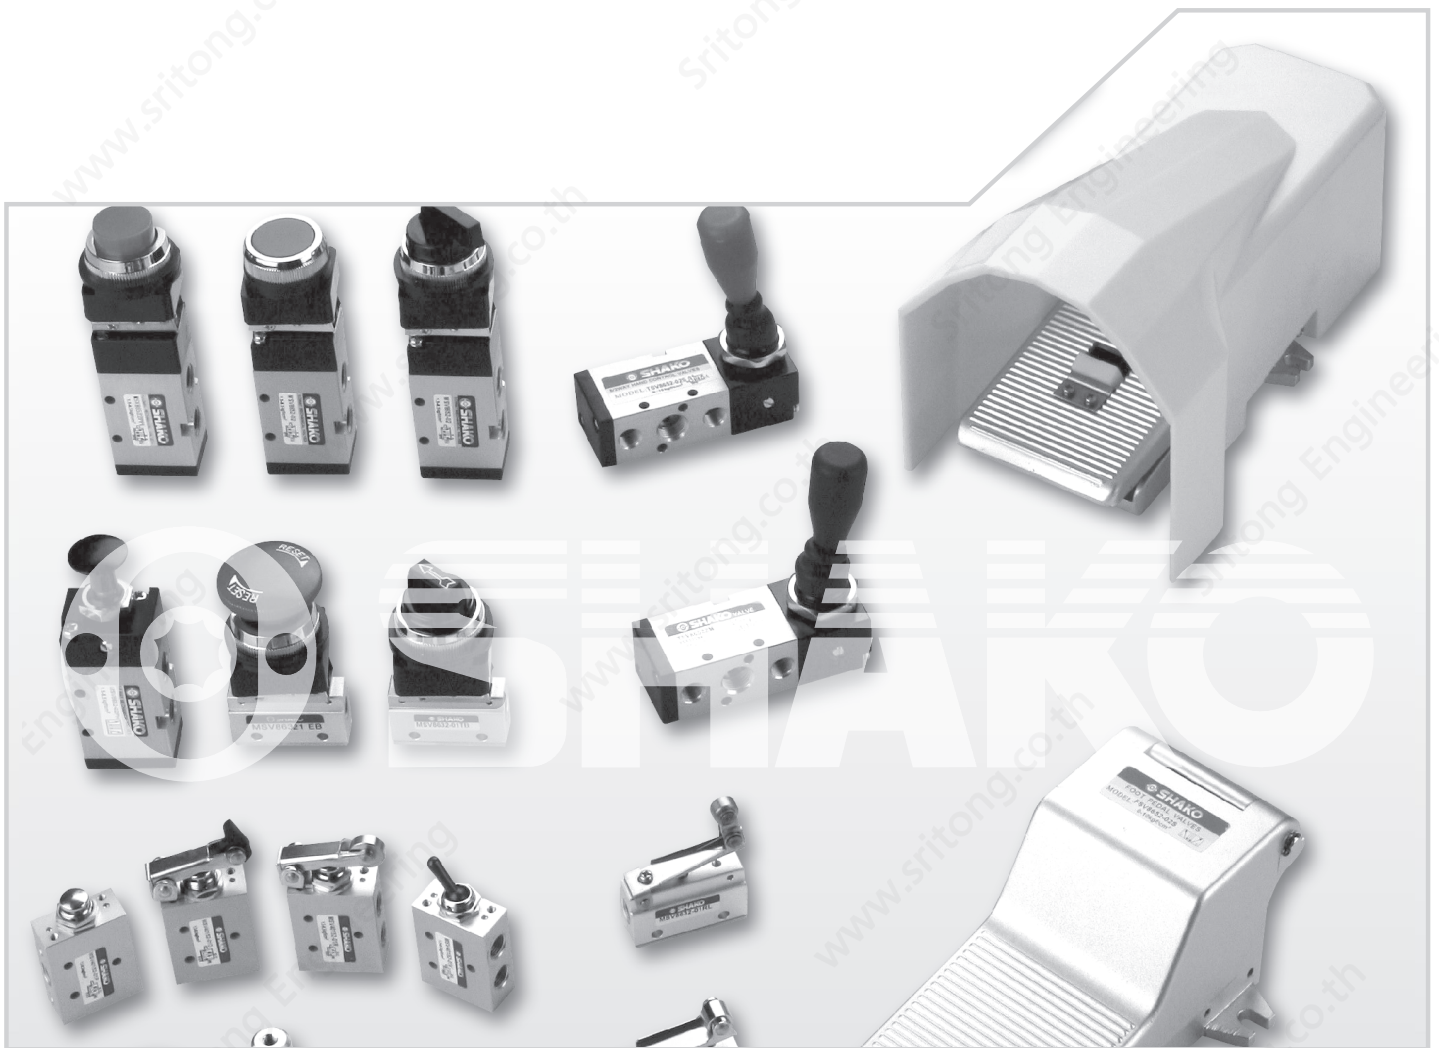


Features


- * Simply operating.
- * Large flow rate.
- * Suitable for vacuum operation.
- * Available for panel mounting.

Symbol

- TSV8753-02M
- TSV8753-02SX
- TSV9832-02M



- TSV8753-02S
- TSV8753-02MX



TSV9832-02M

TSV8753-02S

TSV8753-02M

How to order

TSV8753		02	N	M		F	
Rotary valves		Port size	Thread		Acting	Mounting bracket	
53	5/3 way	02	1/4"	Blank	PS	Blank	W/O bracket
		03	3/8"	N	NPT		
		S	Spring return (For 1/4" port only)				
		M	Detent				
				SX	Exhaust center, Spring return (For 1/4" port only)		
				MX	Exhaust center, Detent		


Flo

Model: TSV


TSV9832		02	N	M
Rotary valves		Port size	Thread	Acting
32	3/2 way	02	1/4"	
			Blank	PS
			N	NPT
				M
				S
				Detent
				Spring return

Flow chart

Model: TSV8753-02,03M(S)

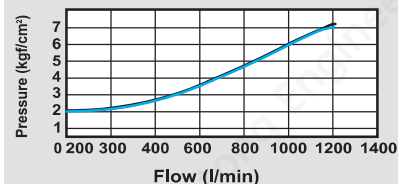

Model: TSV9832-02M(S)

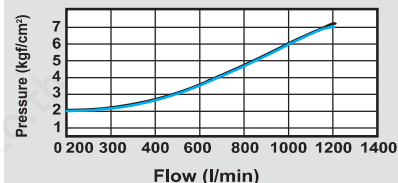


Specifications


Model	TSV8753-02M(S)	TSV8753-03M	TSV9832-02M(S)
Port size	1/4"	3/8"	1/4"
Body material	Aluminum alloy		
Fluid	Compressed air		
Sectional area	18mm ²	35mm ²	18mm ²
Operating pressure range	0 ~ 9 kgf/cm ²		
Max. operating pressure	10 kgf/cm ²		
Ambient temperature	-10°C ~ 60°C		

Dimensions

TSV8753-02, 03

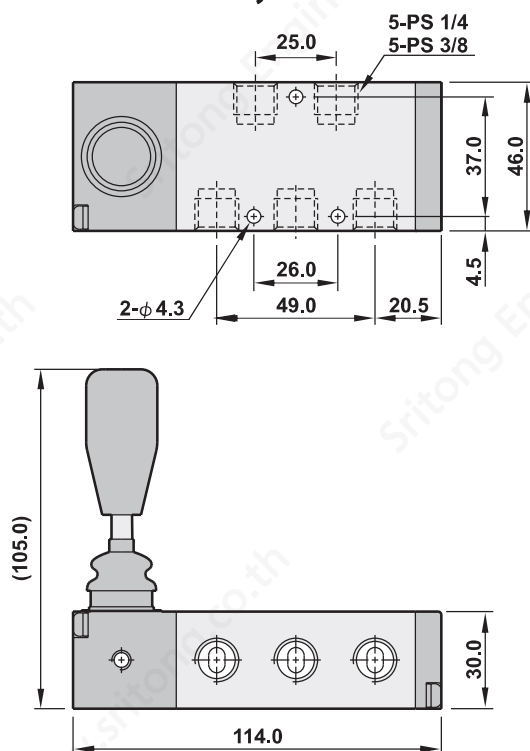

TSV9832-02

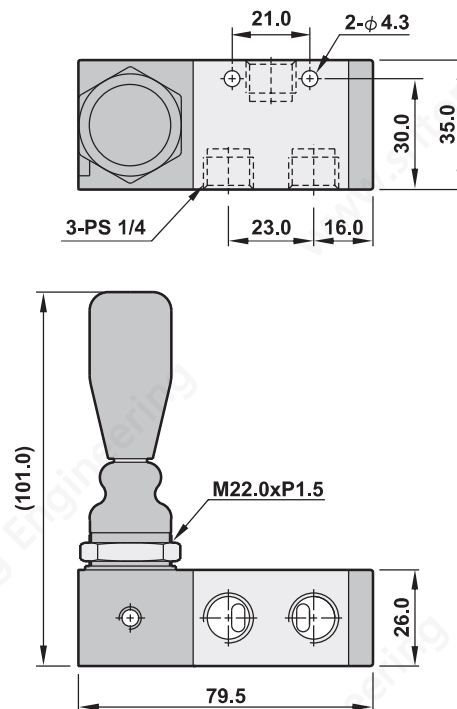

Explosion

Detent

Spring return

