



SHUT-OFF VALVES

DIMENSIONS

MILLIMETERS(INCHES)

HK* Series Shut-off Valves


Ordering Code

HK - G - 4211 - **

Valve Size
4211-10
4211-15
4211-20
4211-25
4211-32

Type of Connection
G: Gasket Mounting
T: Threaded Connection
F: Flanged Connection

Series No:
HK Series Shut-off Valves





Symbol



Model			Nominal Valve Size	Max. Operating Pressure bar	Rated Flow lpm
Threaded Connection	Flanged Connection	Gasket Mounting			
HKT-4211-10	HKT-4211-10	HKT-4211-10	3/8"	210	30
HKT-4211-15	HKT-4211-15	----	1/2"		60
HKT-4211-20	HKT-4211-20	HKT-4211-20	3/4"		100(120)
HKT-4211-25	HKT-4211-25	----	1"		220
HKT-4211-32	HKT-4211-32	HKT-4211-32	1-1/4"		280(400)
----	HKT-4211-40	----	1-1/2"		500
----	HKT-4211-50	----	2"		800

HKT-4211-10~20

Shut-off Valves (Threaded Type)





Symbol



Model	PT d	Size L	D	J	Size		h0	d2	W	H	O-Ring Size (JIS 2401)			Weight kg (lb)
					M						HKA	HKB	HKC	
HKT-4211-10	3/8"	90 (3.54)	45 (1.77)	45 (1.77)	35(1.37) x 40.4(1.59)		74 (2.91)	10 (.39)	85 (3.34)	138 (5.43)	G25	P10	P21	2.1 (4.62)
HKT-4211-15	1/2"	110 (4.33)	52 (2.04)	52 (2.04)	41(1.61) x 47.3(1.86)		84 (3.30)	12 (.47)	130 (5.11)	162 (6.37)	G30	P12.5	G25	3.3 (7.26)
HKT-4211-20	3/4"	110 (4.33)	65 (2.55)	60 (2.36)	46(1.81) x 53.1(2.09)		97 (3.81)	12 (.47)	130 (5.11)	179 (7.04)	G35	P12.5	G25	4.5 (9.90)

HKT-4211-25~32

Shut-off Valves (Threaded Type)

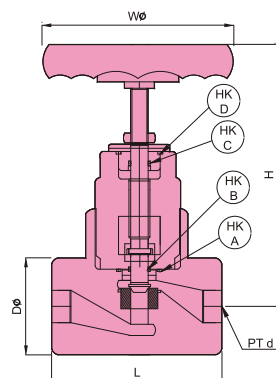

Symbol



Model	PT d	L	A	Size			d2	W	H	O-Ring Size (JIS 2401)				Weight kg (lb)
				h0	J	M				HKA	HKB	HKC	HKD	
HKT-4211-25	1"	135 (5.31)	76 (2.99)	75 (2.95)	90 (3.54)	41(1.61)x47.3(1.86)	12 (.47)	130 (5.11)	194 (7.63)	P25	G45	P12.5	G25	8.5 (18.7)
HKT-4211-32	1-1/4"	150 (5.90)	86 (3.38)	85 (3.34)	95 (3.74)	50(1.96)x57.7(2.27)	16 (.62)	152 (5.98)	216 (8.50)	P32	G50	P16	G35	10.7 (23.5)